

DLR SERIES




3 POINT MOUNTING 'V' — DESIGN SUBSOILERS

FEATURES

1½" X 10" X 36" SHANKS

DLR-630 - CAT III DIRECT
OR QUICK COUPLER
3 POINT HITCH
FOR TRACTORS UP TO
200 H.P.

DLR-640 - CAT III, IVN, OR IV
DIRECT OR QUICK COUPLER
3 POINT HITCH FOR TRACTORS
UP TO 300 H.P.

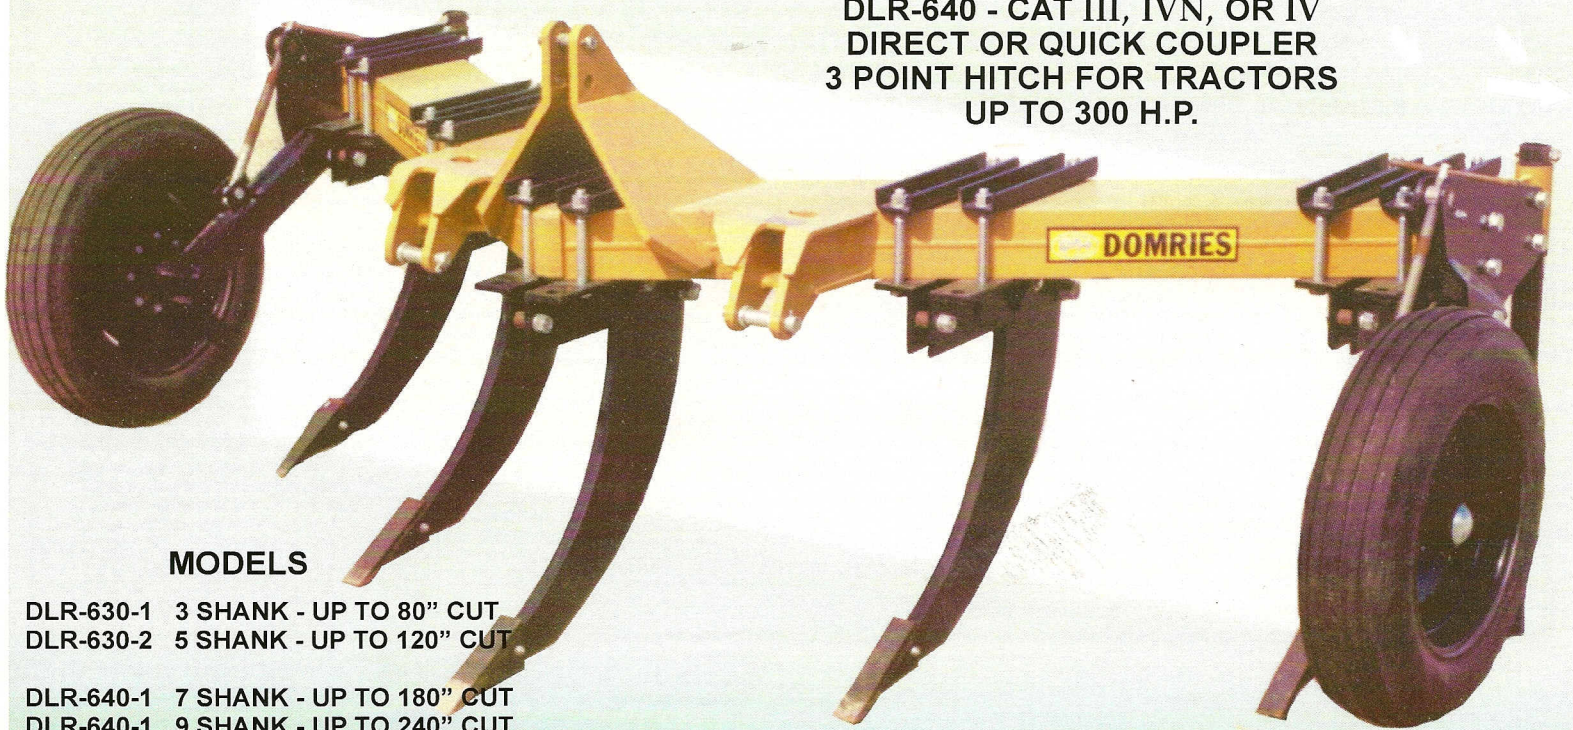

MODELS

DLR-630-1 3 SHANK - UP TO 80" CUT
DLR-630-2 5 SHANK - UP TO 120" CUT

DLR-640-1 7 SHANK - UP TO 180" CUT
DLR-640-1 9 SHANK - UP TO 240" CUT

DOMRIES ENTERPRISES, INC.
12281 Road 29
Madera, California
Phone (559) 673-9143
Fax (559) 673-4110
<http://www.domriesentinc.com>



The Deluxe Disc

3 POINT MOUNTED 'V' DESIGN SUBSOILER FEATURES

THE DOMRIES DLR-630 & DLR-640 3 POINT MOUNTED 'V' SUBSOILERS

FEATURES: THE DLR-630 SUBSOILER HAS A FULL 36" OF VERTICAL CLEARANCE TO MAXIMIZE RIPPING DEPTH & MINIMIZE TRASH BUILD UP. THE MASSIVE SHANKS ARE A FULL 1 1/2" X 10" HI-CARBON STEEL WITH REPLACEABLE SLIP ON POINTS FOR QUICK LOW COST CHANGES -CHOICE OF 3 SHANK UNIT WITHOUT GAUGE WHEELS; 5 SHANK UNIT WITH SINGLE GAUGE WHEELS OR A 7 OR 9 SHANK UNIT WITH DUAL GAUGE WHEELS WITH 7.50-20 TIRES ON RUGGED 8 BOLT HUBS ARE STANDARD. ADJUSTABLE TO 20",30" OR 40" CENTERS {DEPENDING ON MODEL} WITH FIXED LOCATOR STRAPS AT ALL SPACINGS TO MAINTAIN SHANK ALIGNMENT -THE EXTRA HEAVY 6" x 12" BOXED CHANNEL FRAMES ARE ANGLED AT 350 TO PROVIDE MAXIMUM SOIL SHATTERING ACTION & MINIMUM DRAFT LOAD -REQUIRES 20 TO 30 HORSEPOWER PER SHANK -FOR LARGE 2 & 4 WHEEL DRIVE TRACTORS.

DLR-630-1, 3 SHANK & DLR-630-2, 5 SHANK SUBSOILERS

STANDARD EQUIPMENT: 1" THICK HI CARBON STEEL 3 POINT HITCH FOR CAT. III STD. OR QUICK COUPLER HITCH -BOXED CHANNEL 'V' FRAME CONSTRUCTION -1 1/2" X 10" x 36" HI CARBON STEEL SHANKS WITH SLIP-ON POINT & INDIVIDUAL SHEAR PINS - PARKING STANDS - END MTD. SCREW ADJUSTABLE SINGLE GAUGE WHEELS WITH 7.50.20 TIRES {5 SHANK MODEL ONLY} - RECOMMENDED FOR TRACTORS TO 200 H.P .

SPECIFICATIONS

MODEL	FRAME WIDTH	SHANKS		TRANSPORT WIDTH	SINGLE GAUGE WHLS.	WEIGHT LBS.
		NO.	AVAILABLE SPACING			
DLR-630-1	96"	3	20" or 30" or 40"	8'0"	NONE	1,749
DLR-630-2	138"	5	20" or 30"	13'6"	YES	3,034

OPTIONS

ORDER NO.	DESCRIPTION	WEIGHT - LBS.
DLR-36SS	Subsoiler Shank Assembly Complete W/Point & Clamps,	558

DLR-640-1, 7 SHANK & DLR-640-2, 9 SHANK SUBSOILERS

STANDARD EQUIPMENT: 1" THICK HI CARBON STEEL 3 POINT HITCH FOR CAT. III, IV N, OR IVSTD. OR QUICK COUPLER HITCH {INCLUDES LOWER & UPPER UNK PINS FOR CAT. IV N & IV} -EXTRA HVY. 6" x 12" BOXED CHANNEL 'V' FRAME WITH FRAME BRACE & WING EXTENSION MTG. PLATES (BOXED CHANNEL WING EXTENSIONS INCLUDED ON 9 SHANK MODEL) -1 1/2" X 10" x 36" HI CARBON STEEL SHANKS WITH SLIP ON POINTS & INDIVIDUAL SHEAR PINS -FOR TRACTORS TO 300 h.p.

SPECIFICATIONS

MODEL	FRAME WIDTH	SHANKS		TRANSPORT WIDTH	SINGLE GAUGE WHLS.	WEIGHT LBS.
		NO.	AVAILABLE SPACING			
DLR-640-1	192"	7	20" or 30"	17'0"	YES	4,538
DLR-640-2	252" w/ wings	9	20" or 30" or 40"	22'0"	YES	5,019

OPTIONS:

ORDER NO.	DESCRIPTION	WEIGHT - LBS.
DLR-36SS	Subsoiler Shank Assembly Complete W/Point & Clamps,	558
DLR-640-WE	Wing Extensions, A Pair {Required To Convert 640-1 To 640-2}	481
DLR-640-PS	Parking Stands, A Pair {With MTG H/W}	46

SOLD BY



DOMRIES ENTERPRISES, INC.

12281 Road 29

Madera, California 93638

Phone (559) 673-9143 .FAX (559) 673-4110

Visit our website @ <http://www.domriesentinc.com>

