




TANDEM DISK HARROWS

NAPA VALLEY TANDEM

STANDARD FEATURES

- Triple Sealed Ball Bearings
- 1 1/2" S1. Hi Tensile Steel Gang Rods
- Heavy Cast Iron Spools
- Hydraulic Angle Setting
- 22 x 7 Ga. Disc Blades
- Adjustable Hitch Tongue
- Weight Baskets
- Blade extension washers
- Flex Link Bushings & Sleeves
- Rear Gang Leveling Cross Bar
- Front Gang Leveling Turnbuckles
- Adjustable Gang Angle Set Bars
- Steel Tubing Welded Construction
- Rear Hitch For Accessories
- Add-A-Blade Washers
- Hose Kit

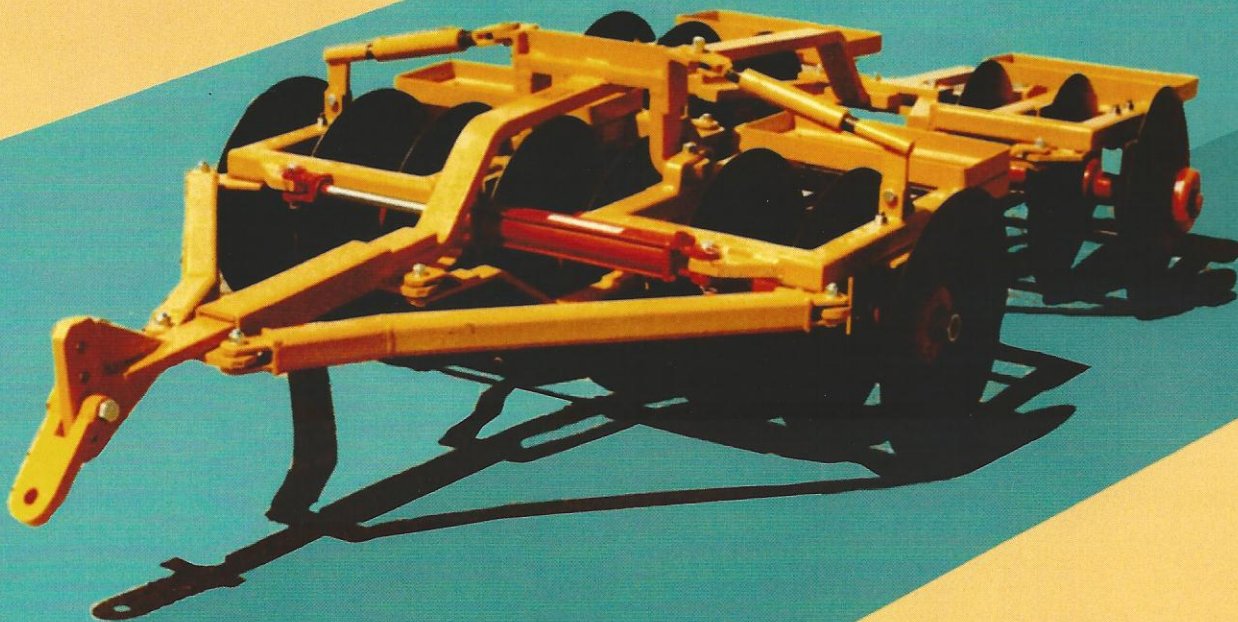

DOMRIES ENTERPRISES, INC.
12281 Road 29
Madera, California 93638
Phone (559) 673-9143 • FAX (559) 673-4110
Visit Our Website @ <http://www.domriesentinc.com>




**A DISC
TO BE PROUD OF**

FEATURES:

- **WEIGHT BASKETS** - Will accomodate 50 or 100 lb. weights as an option. (100 lb. weights shown)
- **CLEANERS** - Each cleaner arm has a one bolt adjustment which is located on top for quick and easy setting. 1/2 or full sets ordered as an option.
- **LOW PROFILE** - Gang frames, main frame, weights, cleaners and all linkage are lower than all of the disc blades.
- **BLADES** - Notched or smooth edge combinations ordered as your choice & option.
- **FRONT GANG LEVELING** - Handy turnbuckles allow quick and easy leveling to any gound condition.
- **REAR GANG LEVELER** - Square trubes that telescope are mounted on the underside of the rear gangs for a level finish and a low profile.
- **FLEX LINKAGE** - Has double bolts on length adjustments. All LINKAGE ENDS have press in bushings; wear sleeves and side thrust washers. For in field replacement if necessary and avoids costly in-shop repairs and expensive parts replacement.
- **GANG END WASHERS** - Come as standard equipment for adding extra blades to the front gangs, rear gangs or both, your option.
- **BEARINGS** - Are tripple sealed ball bearings, flange mounted with a 1 1/2" sq. Hi tensile steel gang rod. Bearing and spacer spools are cast iron for strenght and weight.
- **HYD. CYLINDER** - Cross mounted in damage free location, to adjust gang cutting angle in seconds from tractor seat.



FRONT GANGS

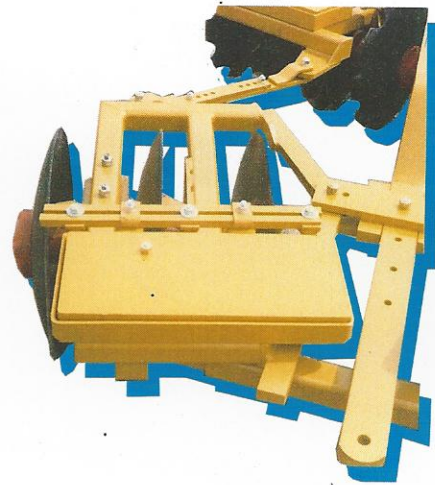

REAR GANG

SPECIFICATIONS

MODEL NO.	APPROX. CUT	TOTAL BLADES	NO BLADES		SIZE BLADES	BLADE SPACING	SIZE GANG ROD	APPROX. WT.	PRICE
			FRONT	REAR					
NVT 430	6 FT.	14	8	6	22"	9"	1 1/2" SQ.	1520	
NVT 440	7 FT.	16	8	8	22"	9"	1 1/2" SQ.	1626	
NVT 540	7 1/2 FT.	18	10	8	22"	9"	1 1/2" SQ.	1725	
NVT 550	8 1/2 FT.	20	10	10	22"	9"	1 1/2" SQ.	1832	

ALL MODELS LISTED ABOVE HAVE SMOTH BLADES. SEE PRICE SHEET FOR NOTCHED BLADE COMBINATIONS.

SOLD BY



DOMRIES ENTERPRISES, INC.
 12281 Road 29
 Madera, California 93638
 Phone (559) 673-9143 • FAX (559) 673-4110
 Visit Our Website @ <http://www.domriesentinc.com>